



TELESCOPIC MAST AND TOWER ELEVATION SOLUTIONS

WB[®]
WILL-BURT
WWW.WILLBURT.COM



Will-Burt offers a wide variety of Portable Cellular, Broadcast and Mobile Elevation Solutions offering both short-term and long-term deployment options. Will-Burt and GEROH masts and ITS towers assure optimal performance of transmission equipment by delivering elevation solutions with unsurpassed rigidity and stability.

Will-Burt's extensive line of pneumatic and mechanical telescoping masts and lattice towers offer the ability to accommodate your unique requirements; whether it is a heavy payload, extremely harsh environment, off-road travel, remote location or an extended deployment period. A commercial-off-the-shelf (COTS) or custom solution will be available to meet your specifications. We offer field, trailer and truck solutions; portable tower systems, COWS and COLTS, to fulfill your long-term and temporary communication requirements.

All of our masts and tower elevation solutions are designed and manufactured to meet or exceed rigorous safety and operational requirements. You can be assured that a Will-Burt, ITS and GEROH elevation solution will successfully meet your specifications and provide reliable and flawless service for years.

WILL-BURT ELEVATION SOLUTION ADVANTAGES

Will-Burt's portable telescopic masts and lattice towers enable your transmission equipment to perform at their highest capability and feature:

- Greater stability and rigidity
- Fast deployment and retraction time
- Easy one person deployment
- Large payload capacity
- Long-term deployment capability

INNOVATIVE CUSTOM SOLUTIONS

Will-Burt's specialized engineers can develop an elevation solution to meet your unique requirements.



CONTENTS



**PNEUMATIC NON-LOCKING
TELESCOPING MASTS 4-5**



**INFLEXION™ ROOF-MOUNTED
TELESCOPING MAST11**



**PNEUMATIC LOCKING
TELESCOPING MASTS 6-7**



**RIBBONLIFT™
LOW PROFILE MAST12**



**PNEUMATIC
COMPRESSOR SYSTEMS 8**



**INTEGRATED
TOWER SYSTEMS 13-16**



MAST ACCESSORIES 9



**POSITIONERS AND
CONTROLLERS17**



**KVL / KVR TELESCOPING
CRANK MAST 10**



PORTABLE MASTS 18-19

PNEUMATIC NON-LOCKING LOW-PROFILE TELESCOPING MASTS



Internal collars deliver lower nested height.

Today's ENG vehicles such as the Ford Transit and Nissan NV, require a high performance telescopic mast with a lower nested height in order to meet highway height restrictions.

Will-Burt's Low-Profile mast with innovative internal collar design optimizes the nested to extended height ratio for a shorter retracted mast. Each collar is stored inside the next rather than stacking the collars one on top of the other – minimizing the stowed mast height.

An integrated locking payload top plate stabilizes the payload when stowed and in transit. Lastly, Will-Burt's mast design reduces extended mast twist for the best possible video feed.



Internal Collar Design
Minimizes height of stowed mast



Innovative Design
Minimizes mast twist when extended

• Low-Nested Height

- Internal collar design minimizes height of stowed mast
- Design optimized for new, smaller ENG vehicles

• Precise and Stable

- Design minimizes mast twist when extended
- Integrated locking payload top plate stabilizes the payload when in transit

• No Maintenance Required

- No routine maintenance required under normal operating conditions
- 5 year manufacturer warranty



Integrated Locking Payload Top Plate
Stabilizes the payload when in transit

LOW-PROFILE NON-LOCKING MASTS SPECIFICATIONS

Model*	7-27	6-29	7-42	6-42	7.3-50
Payload Capacity	200 lb / 91 kg	150 lb / 68 kg	200 lb / 91 kg	150 lb / 68 kg	150 lb / 68 kg
Extended Height	26.7 ft. / 8.2 m	28.4 ft. / 8.7 m	41.2 ft. / 12.5 m	41.2 ft. / 12.5 m	50 ft. / 15.3 m
Nested Height	6.5 ft. / 2 m	6 ft. / 1.8 m	6.8 ft. / 2.1 m	6.3 ft. / 1.9 m	7.3 ft. / 2.3 m
Approximate Mast Weight	118 lb / 53 kg	119 lb / 54 kg	230 lb / 104 kg	223 lb / 101 kg	257 lb / 117 kg
Sections	5	6	8	9	9
Tube Diameter	6.75 in. / 17.15 cm through 3.75 in. / 9.53 cm	6.75 in. / 17.15 cm through 3 in. / 7.62 cm	9 in. / 22.86 cm through 3.75 in. / 9.53 cm	9 in. / 22.86 cm through 3 in. / 7.62 cm	9 in. / 22.86 cm through 3 in. / 7.62 cm
Collars	Internal, Non-Locking	Internal, Non-Locking	Internal, Non-Locking	Internal, Non-Locking	Internal, Non-Locking
Maximum Operating Pressure	35 psig (2.4 bar)	35 psig (2.4 bar)	35 psig (2.4 bar)	35 psig (2.4 bar)	35 psig (2.4 bar)

*Capacity will be affected by wind sail area. Consult factory.

PNEUMATIC NON-LOCKING TELESCOPING MASTS



The Will-Burt Pneumatic Heavy-Duty Non-Locking (HDNL) and Super Heavy-Duty Non-Locking (SHDNL) Masts offer a light-weight solution with a high payload lifting capacity. Our Pneumatic Non-Locking Masts also feature high pointing accuracy and long mast life for high performance and dependability. The pneumatic heavy-duty design makes it inherently safe. What's more, the Pneumatic Non-Locking Masts have controlled exhausting of air for smooth and safe retraction. Locking models are available for extended deployments.

- **Maintains Azimuth – Minimal Twist Deflection**
 - Reliable full-length external keyways
- **Reliable Operation**
 - Anodized aluminum with synthetic bearings
- **No maintenance required**
 - No routine maintenance required under normal operating conditions
 - 5 year manufacturer warranty

SUPER HEAVY-DUTY NON-LOCKING MASTS SPECIFICATIONS

Super Heavy Duty Models	10-38	12-48
Payload Capacity*	1,000 lb / 454 kg	1,000 lb / 454 kg
Extended Height	38 ft. / 11.6 m	48 ft. / 14.6 m
Nested Height	10 ft. / 3 m	12 ft. / 3.6 m
Approximate Mast Weight	400 lb / 181 kg	475 lb / 215 kg
Number of Sections	5	5
Tube Diameter	11.25 in. - 7.5 in. / 286-191 mm	11.25 in. - 7.5 in. / 286-191 mm
Maximum Operating Pressure	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)



HEAVY-DUTY NON-LOCKING MASTS SPECIFICATIONS

Model	6-25	7-30	7-42	8.5-48	8.5-52	9.5-56	9-58
Payload Capacity*	150 lb / 68 kg	150 lb / 68 kg	150 lb / 68 kg	200 lb / 90 kg	100 lb / 45 kg	200 lb / 90 kg	90 lb / 40 kg
Extended Height	25 ft. / 7.6 m	29 ft. / 8.9 m	41.2 ft. / 12.5 m	48 ft. / 14.6 m	52 ft. / 15.8 m	56.2 ft. / 17 m	58 ft. / 17.7 m
Nested Height	5.8 ft. / 1.8 m	6.7 ft. / 2 m	7 ft. / 2.1 m	8.5 ft. / 2.6 m	8.3 ft. / 2.5 m	9.5 ft. / 2.9 m	9 ft. / 2.7 m
Approximate Mast Weight	110 lb / 50 kg	125 lb / 57 kg	235 lb / 107 kg	275 lb / 125 kg	266 lb / 121 kg	296 lb / 135 kg	290 lb / 132 kg
Number of Sections	6	6	9	8	9	8	9
Tube Diameter	6.75-3 in. / 171-76 mm	6.75-3 in. / 171-76 mm	9-3 in. / 229-76 mm	9-3.75 in. / 229-95 mm	9-3 in. / 229-76 mm	9-3.75 in. / 229-95 mm	9-3 in. / 229-76 mm
Maximum Operating Pressure	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)

STANDARD DUTY NON-LOCKING MASTS SPECIFICATIONS *Internally wired versions available

Model	5-20	6-27	7-34	8-30
Payload Capacity*	70 lb / 32 kg	40 lb / 18 kg	40 lb / 18 kg	100 lb / 45 kg
Extended Height	20 ft. / 6.1 m	27 ft. / 8.2 m	33.8 ft. / 10.3 m	29.8 ft. / 9.1 m
Nested Height	5.3 ft. / 1.6 m	6 ft. / 1.8 m	7 ft. / 2.1 m	8 ft. / 2.4 m
Approximate Mast Weight	45 lb / 21 kg	54 lb / 25 kg	67 lb / 31 kg	64 lb / 29 kg
Number of Sections	6	7	7	5
Tube Diameter	5-2.5 in. / 127-64 mm	5-2 in. / 127-51 mm	5-2 in. / 127-51 mm	5-3 in. / 127-76 mm
Maximum Operating Pressure	20 PSIG (1.4 bar)	20 PSIG (1.4 bar)	20 PSIG (1.4 bar)	20 PSIG (1.4 bar)

*Capacity will be affected by wind sail area. Consult factory.

PNEUMATIC LOCKING HD & SHD TELESCOPING MASTS



Designed for extended deployment periods.

Available in both Heavy Duty and Super Heavy Duty models, these masts offer a light weight elevation solution with a high payload capacity. These vehicle or trailer mounted telescoping masts feature locking collars that allow the mast to remain extended indefinitely without air pressure. Full-length keyways maintain directional azimuth and provide precise pointing accuracy. Standard models are available in heights from 30 ft. / 8.9 m to 134 ft. / 40.8 m with payload capabilities up to 450 lbs. / 205 kg.

- **Maintains Height Indefinitely**
 - Locking collars are easy to operate
- **Maintains Azimuth – Minimal Twist Deflection**
 - Full-length external keyways
- **No Maintenance Required**
 - No routine maintenance required under normal operating conditions
 - 5 year manufacturer warranty



SUPER HEAVY DUTY LOCKING MASTS SPECIFICATIONS

Model	9-50	10.3-60	10.8-76	15.7-100
Payload Capacity*	450 lb. / 205 kg	450 lb. / 205 kg	200 lb. / 91 kg	450 lb. / 205 kg
Extended Height	50 ft. 5 in. / 15.3 m	60 ft. 6 in. / 18.4 m	76 ft. 2 in. / 23 m	100 ft. 5 in. / 30.3 m
Nested Height	9 ft. 2 in. / 2.8 m	10 ft. 5 in. / 3.18 m	10 ft. 9 in. / 3.3 m	15 ft. 8 in. / 4.8 m
Approximate Mast Weight	500 lb. / 227 kg	500 lb. / 227 kg	536 lb. / 245 kg	790 lb. / 361 kg
Number of Sections	8	8	10	8
Tube Diameter	11.25 - 5.25 in. / 288-135 mm	11.25 - 5.25 in. / 288-135 mm	11.25 - 3.75 in. / 288-96 mm	11.25 - 5.25 in. / 288-135 mm
Collar Type	Locking w/T-Handles	Locking w/T-Handles	Locking w/T-Handles	Locking w/T-Handles & Trip Lines
Maximum Operating Pressure	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)

HEAVY DUTY LOCKING MASTS SPECIFICATIONS

Model	7-30	7-42	10-60	14.5-80	17-100	20-134
Payload Capacity*	150 lb. / 68 kg	150 lb. / 68 kg	200 lb. / 90 kg	300 lb. / 136 kg	300 lb. / 136 kg	200 lb. / 90 kg
Extended Height	29 ft. 1 in. / 8.9 m	41 ft. 3 in. / 12.6 m	59 ft. 9 in. / 18.3 m	79 ft. 9 in. / 24.3 m	99 ft. 9 in. / 30.4 m	133 ft. 9 in. / 40.8 m
Nested Height	7 ft. / 2.1 m	7 ft. 9 in. / 2.3 m	10 ft. 1 in. / 3m	14 ft. 3 in. / 4.3 m	17 ft. 2 in. / 5.2 m	20 ft. 2 in. / 6.1 m
Approximate Mast Weight	125 lb. / 57 kg	235 lb. / 107 kg	330 lb. / 150 kg	416 lb. / 189 kg	480 lb. / 218 kg	600 lb. / 273 kg
Number of Sections	6	9	8	7	7	8
Tube Diameter	6.75-3 in. / 171-76 mm	9-3 in. / 229-76 mm	9-3.75 in. / 229-95 mm	9-4.5 in. / 229-114 mm	9-4.5 in. / 229-95 mm	9-3.75 in. / 229-95 mm
Collar Type	Locking w/T-Handles	Locking w/T-Handles	Locking w/T-Handles	Locking w/T-Handles	Locking w/Trip Lines	Locking w/ Trip Lines
Guying Required	Not Required	Not Required	Not Required	4 way / 4 level	4 way / 4 level	4 way / 5 level
Max. Operating Pressure	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)	35 PSIG (2.4 bar)

*Dimensions provided are for reference only and are not intended for vehicle design purposes. Specifications subject to change without notice. *Capacity will be affected by wind sail area. Consult factory.

PNEUMATIC LOCKING ULTRA HEAVY-DUTY TELESCOPING MASTS



Higher payload capacity with shorter nested height.

The Ultra Heavy-Duty Pneumatic Mast with Locking Collars delivers an unparalleled combination of strength and rigidity in a design that delivers the performance of a hydraulic mast at less weight and without the need for environmentally dangerous fluids.

The Ultra Heavy-Duty mast was specifically designed for mobile communications providing better unguyed performance at lower nested heights – eliminating the need for an expensive tilt system.

• Strong


- Elevates heavier loads with greater wind sail area
- Greater unguyed performance
- Close azimuth for less twist for signal accuracy

• Fast & Efficient

- Lower nested height eliminates the need for costly and complicated tilt systems
- Easier to deploy in urban areas
- Safe long-term deployment with easy to operate positive locking pins

• Reliable

- 5 year manufacturer warranty
- No maintenance required
- No hydraulic fluid concerns

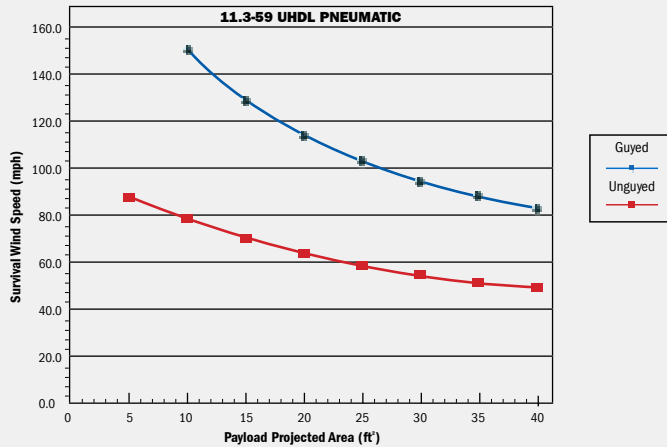

ULTRA HEAVY DUTY LOCKING MASTS SPECIFICATIONS

Ultra Heavy-Duty Mast	11.3-59	9.8-65.6
Payload Capacity*	1200 lb / 544 kg	450 lb / 204 kg
Extended Height	59 ft. / 18 m	65.6 ft. / 20 m
Nested Height	11.3 ft. / 3.4 m	9.8 ft. / 3 m
Approximate Weight	880 lb / 399 kg	786 lb / 357 kg
Number of Sections	7	10
Tube Diameter	13.5 in. / 34.29 cm through 7.5 in. / 19.05 cm	13.5 in. / 34.29 cm through 5.25 in. / 13.34 cm
Collar Type	Locking with Super Pins	Locking with Super Pins
Maximum Operating Pressure	35 psig (2.4 bar)	35 psig (2.4 bar)
Example #1: Survival Wind Speed Unguyed: 1,200 lb and 21.5 sq. ft. sail area (Cd=1.5)	56 mph (unguyed)	
Example #2: Survival Wind Speed Unguyed: 1,200 lb and 7 sq. ft. sail area (Cd=1.5)	80 mph (unguyed)	
Example #3: Survival Wind Speed with Optional Guying: 1,200 lb and 21.5 sq. ft. sail area (Cd=1.5)	80 mph (guyed)	

*Dependent on payload configuration. 1,200 lb with optional 8 1/4" intermediate clamps (assumes 200 pounds attached to 8 1/4" tube)

PNEUMATIC SYSTEMS by Will-Burt

Will-Burt offers a variety of low maintenance oil-less air compressor systems, all specifically designed for optimal performance for use with Will-Burt Telescoping Masts. These pneumatic systems include only the highest quality components available to ensure the system provides years of trouble-free service.



AC Models	5255802	5255801	902404	903193	912361
Mast Application	All	All	All	Standard	All
Voltage	110VAC / 50Hz & 60Hz	230VAC / 50Hz & 60Hz	110VAC / 60Hz	220VAC / 50Hz	220VAC / 60Hz
CFM	6.5	6.5	4.4	2.01	4.4
Ltr / Min	185	185	125	57	101
Operating Temperature	-4°F to 122°F / -20°C to 50°C	-4°F to 122°F / -20°C to 50°C	50°F to 104°F / 10°C to 40°C	50°F to 104°F / 10°C to 40°C	50°F to 104°F / 10°C to 40°C
HandHeld Remote Control	x	x	Optional	Optional	Optional
Protective Enclosure	x	x			
Cooling Fan	x	x	x	x	x
Air hose w/ Fittings	x	x	x	x	x
Pressure Gauge	x	x	x	x	x
Check Valve	x -cut out 32 ±2 psi	x -cut out 32 ±2 psi	x -cut out 32 ±2 psi	x -cut out 32 ±2 psi	x -cut out 32 ±2 psi
Current Draw	10 amp	5.1 amp	10.6 amp	4.1 amp	5.3 amp
Weight	25.4 lb / 11.5 kg	36.4 lb / 16.5 kg	45 lb / 20.4 kg	55 lb / 24.95 kg	45 lb / 20.4 kg
Dimensions	8" W x 11.6" H x 11.9" D / 203mm W x 295mm H x 302mm D	8" W x 11.6" H x 11.9" D / 203mm W x 295mm H x 302mm D	15" W x 8.91" H x 11.61" D / 381mm W x 227mm H x 295mm D	12.6" W x 9.0" H x 16.8" D / 320mm W x 229mm H x 427mm D	15" W x 8.91" H x 11.61" D / 381mm W x 227mm H x 295mm D



DC Models	5059901	5059902	5058501	5058502
Mast Application	Standard	Standard	All	All
Voltage	12VDC	24VDC	12VDC	24VDC
CFM	1.4	1.4	6.1	6.7
Ltr / Min	40	40	173	191
Operating Temperature	-4°F to 122°F / -20°C to 50°C	-4°F to 122°F / -20°C to 50°C	-4°F to 122°F / -20°C to 50°C	-4°F to 122°F / -20°C to 50°C
HandHeld Remote Control	x	x	x	x
Protective Enclosure	x	x	x	x
Cooling Fan			x	x
Air hose w/ Fittings	x	x	x	x
Pressure Gauge	x	x	x	x
Check Valve	x -cut out 15 ±2 psi	x -cut out 15 ±2 psi	x -cut out 32 ±2 psi	x -cut out 32 ±2 psi
Current Draw	12 amp	8 amp	55 amp	30 amp
Weight	17.6 lbs. / 8 kg	17.6 lbs. / 8 kg	29.8 lbs. / 13.5 kg	29.8 lbs. / 13.5 kg
Dimensions	5.2" W x 10.6" H x 9.2" D / 131mm W x 267mm H x 233mm D	5.2" W x 10.6" H x 9.2" D / 131mm W x 267mm H x 233mm D	8" W x 11.6" H x 11.7" D / 203mm W x 295mm H x 298mm D	8" W x 11.6" H x 11.7" D / 203mm W x 295mm H x 298mm D

MAST ACCESSORIES

D-TEC II® SAFETY SYSTEM

The D-TEC II® safety unit provides overhead power line and obstacle detection and above-the-mast illumination. The built-in anti-collision system automatically stops mast extension, providing added protection from overhead hazards for the operator and equipment. The D-TEC II® safety system is available on vertical telescoping masts.



D-TEC II® SAFETY FEATURES:

- **Look-up light**
 - Illuminates area directly above telescoping mast
- **High-voltage sensor**
 - Aids operator in detecting overhead power lines
- **Anti-collision sensor**
 - Automatically stops mast extension when overhead obstructions are detected
- **Factory preset sensitivity setting**



Detection	AC voltage, electromagnetic & electrostatic field detection
Look-up Light	LED Look-up Light
Anti-Collision Sensor	8 ft. / 2.4 m proximity
Tilt Warning Sensor	Senses tilt of 10° or more from vertical
Power Requirements	12 VDC, 10 amp
Interconnecting Cable	2 twisted pair shielded (sensor to control unit)
Environmental Conditions	Sensor IP67, Control IP65



EXTERNAL CABLE MANAGEMENT

NYCOIL® is a coiled conduit used to house wiring, antenna coax and positioner cable that is too large to fit inside the mast. NYCOIL® easily fits around the mast and extends neatly and compactly retracts when the mast is nested.

A variety of sizes is available from 0.5" / 1.27 cm to 1.25" / 3.2 cm in diameter with lengths available up to 100 ft. / 30 m.



PNEUMATIC MAST FINISHES

Will-Burt's Lukon 24 Mast finish is a patented process of hard anodizing aluminum surfaces and applying a permanent Teflon® lubricant. This provides improved service in all weather conditions and increases life expectancy. Field proven worldwide under all environmental conditions including military.


WILL-BURT ALSO OFFERS STANDARD OFF THE SHELF AND CUSTOM MOUNTING AND INTEGRATION HARDWARE AND DESIGN SOLUTIONS.

KVL & KVR TELESCOPIC CRANK MAST

The Family of light duty GEROH Telescopic Crank Masts is characterized by lightweight construction in addition to superior stability, reliability and long life. The KVL and KVR mast systems are in use in military and commercial applications such as communications testing, surveillance and lighting and are designed for vehicle, trailer, shelter or field deployment. The mast sections consist of close tolerance precision mast profiles which ensure precise pointing accuracy. Safe deployment and retraction is assured, even with ice or heavy wind conditions.

ESSENTIAL FEATURES

- **Automatic locking system (KVR)**
 - Deploy at any height
- **Precision tube fit**
 - Maintains azimuth
- **Powerful cable drive system**
 - Deploy and retract in extreme weather conditions
- **Optional motor drive system**
- **Designed for trailer, shelter, vehicle or field mounting**
- **MIL-STD 810-F qualified**
- **MIL-STD 810-G qualified**
- **Field Deployment Kit Optional**

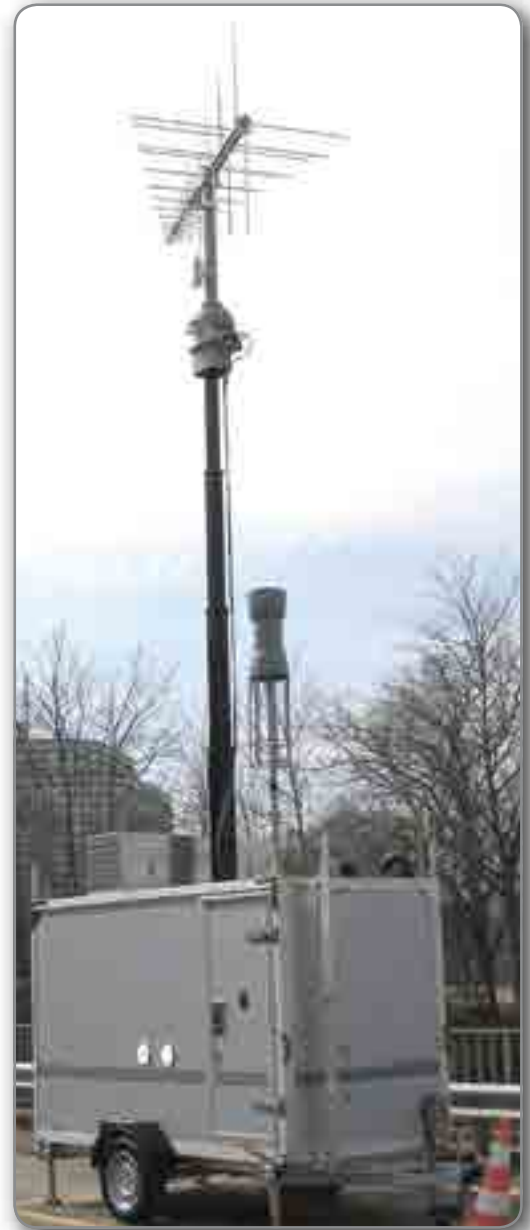

KVL Specifications	2.5 KVL 3	4 KVL 4	6 KVL 5	8 KVL 5	10 KVL 6	12 KVL 6
Extended Height	8.2 ft. / 2.5 m	13.1 ft. / 4 m	19.6 ft. / 6 m	26.2 ft. / 8 m	32.8 ft. / 10 m	39.2 ft. / 12 m
Nested Height	3.5 ft. / 1.1 m	4.2 ft. / 1.3 m	5 ft. / 1.5 m	6.2 ft. / 1.9 m	6.9 ft. / 2.1 m	7.9 ft. / 2.4 m
Payload Capacity	55 lb / 25 kg	55 lb / 25 kg	55 lb / 25 kg	44 lb / 20 kg	33 lb / 15 kg	33 lb / 15 kg
Approximate Mast Weight	35 lb / 16 kg	45 lb / 20.5 kg	53 lb / 24 kg	68 lb / 31 kg	88 lb / 40 kg	99 lb / 45 kg
Number of Sections	3	4	5	5	6	6

KVR Specifications	2.5 KVR 3	4 KVR 3	6 KVR 5	8 KVR 5	10 KVR 6	12 KVR 6	14 KVR 5	18 KVR 6
Extended Height	8.2 ft. / 2.5 m	13.1 ft. / 4 m	19.6 ft. / 6 m	26.2 ft. / 8 m	32.8 ft. / 10 m	39.2 ft. / 12 m	45.9 ft. / 14 m	59.1 ft. / 18 m
Nested Height	3.9 ft. / 1.2 m	5.5 ft. / 1.7 m	5.5 ft. / 1.7 m	6.9 ft. / 2.1 m	7.5 ft. / 2.3 m	8.5 ft. / 2.6 m	10.8 ft. / 3.3 m	11.9 ft. / 3.6 m
Payload Capacity	154 lb / 70 kg	143 lb / 65 kg	154 lb / 70 kg	154 lb / 70 kg	110 lb / 50 kg	110 lb / 50 kg	88 lb / 40 kg	80 lb / 40 kg
Approximate Mast Weight	66 lb / 30 kg	77 lb / 35 kg	110 lb / 50 kg	134 lb / 61 kg	187 lb / 85 kg	205 lb / 93 kg	187 lb / 85 kg	271 lb / 123 kg
Number of Sections	3	3	5	5	6	6	5	6

*Capacity will be affected by wind sail area. Consult factory.



INFLEXION™

INFLEXION™ ROOF-MOUNTED TELESCOPING MAST



The Will-Burt Company has partnered with the industry leaders in broadcast vehicle integration for over 30 years. This has allowed Will-Burt to identify advances and changes in broadcast technology early and design elevation solutions to optimize that technology.

Inflexion™ was designed to meet the elevation requirements of smaller, advanced broadcast devices. The roof-mounted, self-contained Inflexion™ can easily be integrated onto nearly any vehicle, from traditional broadcast vans to small, front-wheel drive vehicles. This allows you to take full advantage of fuel and vehicle cost savings.

STANDARD FEATURES

- **Compact, roof-mount design**
 - No interior space needed
- **Self-contained elevation system**
 - No compressor or generator required
- **Years of reliable service**
 - Field proven design with over 25 years of service - 2 year manufacturer warranty
- **High payload capacity and height options**
 - From 5 ft. / 1.5 m to 25 ft. / 7.5 m
- **Accommodates a variety of payloads**
 - Antennas, satellite dish, radar, lighting and cameras
- **12 VDC operation**
- **Color**
 - White
- **Analog Handheld controller**
 - Includes mast up/down function

OPTIONAL FEATURES

- **InflexionPlus**
 - Accommodates full function handheld controller (sold separately)
- **Color**
 - Black
- **Internal wiring or Nycoil**
 - Consult factory for specific application
- **24 VDC operation**

INFLEXION™ SPECIFICATIONS

Model	1.5	2.3	4.5	6.0	7.5
Extended Height	55" / 140 cm	79" / 200 cm	168" / 427 cm	228" / 579 cm	287" / 729 cm
Maximum Payload Capacity*	60 lbs. / 27 kg	60 lbs. / 27 kg	100 lbs. / 45 kg	70 lbs. / 31 kg	57 lbs. / 25 kg
Stowed Dimensions (Approximate) (L x W x H in. / cm)	66" x 12" x 12" / 165 x 30 x 29	43" x 16" x 11" / 110 x 38 x 23	63" x 16" x 12" / 159 x 40 x 29	80" x 16" x 11" / 202 x 40 x 28	91" x 16" x 11" / 223 x 40 x 28
Approximate System Weight	52 lbs. / 24 kg	66 lbs. / 30 kg	110 lbs. / 50 kg	123 lbs. / 56 kg	134 lbs. / 61 kg
Operating Temperature Range	-22°F to +149°F / -30°C to +65°C				

*The added weight of a positioner or D-TEC II will reduce maximum payload capacity. Capacity will be affected by wind sail area. Consult factory.



RIBBONLift™

RIBBONLIFT™ ELEVATION

Not Intended for a Personnel Lift!

Designed to meet the demands of the entertainment industry, the RibbonLift is able to accomplish a multitude of positioning tasks elegantly and unobtrusively. The nearly silent mechanics will not cause a distraction during a performance and the low retracted profile and slender column will not interfere with the sight lines of the audience. Designed to meet the demands of both indoor and outdoor venues, the RibbonLift is able to accomplish a multitude of positioning tasks elegantly and unobtrusively. The RibbonLift's compact design makes it well-suited for quick repositioning during performances and fast tear down when it is time to move to the next venue. The RibbonLift extends and retracts quickly with the push of a button and provides nearly unlimited flexibility when it comes to speed and height positioning. The RibbonLift's unrivaled ability to securely position significant loads at great heights has made it the preferred positioning solution in the entertainment industry.

ADVANTAGES OF PATENTED RIBBONLIFT TECHNOLOGY

- **Compact**
 - Low retracted height
- **Unobtrusive when extended**
- **Stable**
 - Strong, interlocking ribbons of steel
- **Quiet**
 - Will not disturb the performance
- **Precise positioning with speed control**
- **Portable design**
- **Flexible**
 - Use upright or inverted



RIBBONLIFT™ SPECIFICATIONS

Model	2-10	3-12	4-15	6-20	12-25
Vertical Lift Capacity (indoors)	20 lb / 9.1 kg	50 lb / 22 kg	115 lb / 52 kg	200 lb / 90 kg	400 lb / 181 kg
Extended Height (indoors)	10 ft. / 3 m	12 ft. / 3.7 m	15 ft. / 4.5 m	20 ft. / 6.1 m	25 ft. / 7.6 m
Inverted Capacity	40 lb / 18.1 kg	100 lb / 45 kg	250 lb / 113 kg	400 lb / 181 kg	800 lb / 363 kg
Nested Height with Cable Management	N/A	20" / 51 cm	26" / 66 cm	40" / 101 cm	45" / 114 cm
Nested Height without Cable Management	10.4 in. / 26.5 cm	12 in. / 30 cm	17 in. / 43 cm	27 in. / 61 cm	33 in. / 83 cm
Approximate Mast Weight	44 lb / 20 kg	80 lb / 37 kg	150 lb / 68 kg	350 lb / 159 kg	625 lb / 284 kg
Base Diameter	Oval: 22.4 in. x 16.4 in. / 56.9 cm x 41.7 cm	22 in. / 56 cm	32 in. / 81 cm	45 in. / 114 cm	47 in. / 119 cm
Full Mast Extension Time	48 seconds	48 seconds	45 seconds	40 seconds	38 seconds
Power Requirements (VAC)	115	115 or 230	115 or 230	115 or 230	230
Power Requirements (VDC)	12 or 24	12 or 24	12 or 24	12 or 24	12 or 24



THE ADVANTAGES OF INTEGRATED TOWER SYSTEMS

Integrated Tower Systems-ITS, a Will-Burt Company, is a global leader in the manufacture, sales and rental of an extensive and affordable line of rapid-deployment Portable Tower & Mast Systems; Tower & Mast Integrated Trailers, Trucks, Communication-Site-on-Wheels (COWs), and Mast-, Satellite- and Tower-Integrated Mobile Command and Communication Centers. This state-of-the-art equipment is designed specifically to support a global contingent of ITS clientele representing the following industries:

- Telecommunications, Infrastructure Development/Restoration; Tower Owners/Operators Multi-media, Broadcasting
- First Responder, Public Safety and Emergency Management; Law Enforcement, Incident Command, Search & Rescue
- Homeland Defense/National Security, Domestic and Foreign Military Initiatives; Tactical and Support Functions
- Immigration and Customs Enforcement, Border Security; Disaster Preparedness/Emergency Response
- Geophysical, Oil & Gas and Alternative Energy; Meteorological, Frequency and Weapon Systems Testing
- Transportation, Aviation, Aerospace and Construction; Entertainment, Logistics, Engineering, Municipal and Corporate Programs
- Global Support of Special Events; Political, Commercial, Industrial, Sporting, Civic and Numerous other Markets/Industries Served

In an ongoing effort to support National Security, Public Safety, Emergency Response and Military Initiatives world-wide, ITS' affordable and innovative rapid response systems are manufactured to both civilian and military specifications and built to withstand many of the world's most demanding environments. Whether designed for the seamless installation of common or client-specific technologies, or pre-integrated with an ITS or client-furnished Communications or Surveillance Solution, ITS' rapidly deployed equipment are proven key components in establishing the flow of vital information from remote and urban areas of need. **For additional information, please visit our website at www.itstowers.com or contact an ITS Representative Toll Free at 1-(800)-850-8535.**

	MOBILE TOWER SOLUTIONS	MOBILE MAST SOLUTIONS
Self-Support & Guyed Heights	±38', 55', 72', 89', 106' & 130' / 11.6m, 16.8m, 21.9m, 27.1m, 32.3m & 40m	30' - 100' / 9m - 30m
Tower Capacity	Standard Payloads: Up to: ±550 lb / 250 kg Upgraded Payloads: Up to: ±750 lb / 340 kg	Payloads Up To: 1,200 lb / 544 kg
Power	120-220 VAC / 60-50 Hz Configurations	
Common Use	Border Security • Broadcasting • Disaster Recovery / Emergency Response • Lighting • Remote Communications • Site Security • Surveillance • Energy Exploration / Production Sites • Sensor Applications • Systems Testing • Telecommunications • Temporary Cell Site	

MOBILE TOWER SOLUTIONS

SR SERIES – PORTABLE TOWER TRAILER

(Multiterrain Configuration)



NC/SR SERIES – COMMUNICATION-SITE-ON-WHEELS (COW)



SC SERIES – COMMUNICATION-SITE-ON-WHEELS (COW)



TMT SERIES – TRUCK MOUNTED TOWER SYSTEM



MOBILE MAST SOLUTIONS

MT SERIES – TRAILER MOUNTED MAST

(Integrated Tilt Capabilities)



COW SERIES – TRAILER MOUNTED MAST

(Vertical Mast Installation)



RD-S / RD-T SERIES – TRAILER MOUNTED MAST

(Multiterrain Configuration)



SRS-M SERIES – TRAILER MOUNTED MAST





ITS RENTAL AND FLEXI-FLEET CONFIGURATIONS – PORTABLE TOWER SYSTEMS

ITS Rental Programs offer a wide variety of innovative, efficient and flexible options to meet customer's temporary, long-term, and emergency communications needs. Whether originating from ITS manufacturing headquarters or a Domestic or International Fleet Depot, we offer customers both in-house and field services including; training, equipment integration, deployment and decommissioning coordination, customs and transportation logistics, and other necessary services to assist with temporary use requirements.

As designed, each trailer's skeletal frame is engineered with a minimum factor of safety of 2:1, with 4:1 in critical load areas. A multi-section ~ 21'0" / 6.4m each, lattice steel telescopic structure is designed to transport horizontally over the trailer's equipment platform and automatically tilt by means of a heavy-duty, chrome plated hydraulic cylinder. The tower system is raised to its full extension utilizing a direct drive, minimum 1HP, totally enclosed fan cooled (TEFC), wash-down rated electric winch motor and gearbox assembly. Each Portable Tower System model is capable of being deployed, elevated to its full-extended height, and secured by a mechanical tower lock mechanism by one person in under 30 minutes. For added security and stability during poor weather conditions, excessive loading, long-term deployment, or to minimize structure deflection for critical applications, the tower may be further protected by the use of an included guy cable and ground anchor system.

ITS Telescopic Tower Systems

- ±106' / 33m and ±125' / 38m Self-Supporting and Guy Capable Tower Elevations
- Fully Automated, Direct Drive Tower Operating System; No Belts, No Chains, No Guy Wires Required
- ±550 lb / 250 kg Standard Tower Load Capacity; 120-220VAC Electrical Configuration
- Greatest Self-Supporting and Guyed Wind / Payload Capacity of Any Comparable Tower System
- Multi-Terrain, Custom Drawbar Trailers with Outrigger Stabilization; Electric Brakes and LED Lighting
- 15,000 lb / 6,803 kg – 22,000 lb. / 9,977 kg Capacity GVWR; 4,000 lb / 1,814 kg to 6,000 lb / 2,721 kg Equipment Capacity



POSITIONER AND CONTROLLER

POSITION^{IT}

ESSENTIAL FEATURES

- **Replacement for MOOG QuickSet QPT Positioners**
- **Pelco-D RS-485 Communications**
- **Strong lightweight construction**
 - Die-cast aluminum casing
- **Minimal backlash**
 - Precision turned and milled components with ball races on major axes
- **Built to last**
 - Stainless steel fasteners
- **Weatherproof**
 - IP 68 rating
- **Simple to install**
- **Universal mounting plate**
 - Suitable for most common payloads
- **Corrosion resistant finish**
 - Black
- **Regenerative braking**
 - On motor shaft
- **Long operational life**
 - Maintenance-free and 3 year warranty
- **Flexible connection**
 - Bottom or side



POSITION^{IT} SPECIFICATIONS

Model	PI-150	PI-75
Payload Capacity	150 ft lb / 202 Nm	75 ft lb / 101 Nm
Height	11.32 in. / 287.7 mm	11.32 in. / 287.7 mm
Width	12.4 in. / 314 mm	9.21 in. / 234 mm
Weight	37 lb / 16.8 kg	35 lb / 16 kg
Operating Temperature	-20°C to 50°C / -4°F to 122°F	
IP Rating	68 - Waterproof (immersion) and Dustproof	
Pan Axis	400° (± 200°)	
Pan Speed (proportional)	0.02 to 6.5° / second	
Tilt Axis	180° (± 90°)	
Tilt Speed (proportional)	0.02 to 5.5° / second	
Backlash	≤ 0.15°	
Repeatability	≤ 0.3°	
Maximum Continuous Power	44 W	
Maximum Running Current	1.85 amps	
Input Voltage	24 VDC - Converters available for 12 VDC and AC power sources	

POSITION^{IT} CONTROLLER

The Pelco-D compatible controller with LCD screen has all of the features necessary to optimize the performance of the PositionIt positioner. Precision joystick controller flawlessly controls the pan and tilt functions. Includes LCD screen, keyboard and programmable presets that simplify operation.

POSITION^{IT} CONTROLLER SPECIFICATIONS

Input Voltage	12V DC
Power	0.5 watts
Communication Interface	RS485
Communication Frequency	2400, 4800, 9600, 19200 bps
Operating Temperature	32°F to 122°F / 0°C to 50°C
Dimensions (L x W x H)	6.6 in. x 5.4 in. x 4.2 in. / 168mm x 136mm x 105mm
Weight	.89 lb / .4 kg



PORTABLE MASTS



The AntennaMast model AM2 is a rugged, lightweight, man-portable, aluminum tripod mast designed for rapid payload deployment. The AM2 is extremely flexible and reliable and is capable of elevating multiple devices on a single mast.

Payload deployment options:

1. The EZ Raze™ system with cable winching device and safety brake enables the user to lift and lower heavier payloads in a safe and controlled manner without disassembling the mast system.
2. The mast tube lift winch provides a mechanical assist for the lifting of the mast tubes for heavier payloads.
3. The user is also able to elevate the mast tubes and payload by breach loading the tubes through the tripod center collar.



**AM2 with EZ Raze
Payload Elevation System**
Easily elevate and lower multiple
antennas and sensors



AM2 with Mast Tube Lift Winch

ESSENTIAL FEATURES

- **Rapid set-up** – Includes a tripod with two (2) built-in levels and large no-slip adjustment knobs that are easy to operate. Interlocking mast tubes allow for directional adjustment of the payload.
- **Flexible** – A variety of payload adaptors and accessories are available to accomplish diverse missions.
- **Simple** – No tools or special training are needed for deployment.
- **Rugged** – Designed to meet MIL-STD-810 for use in a variety of harsh environments.
- **Durable** – Components are constructed of aluminum and stainless steel and are covered by a two (2) year warranty.
- **Complete system** – AM2 system includes all components needed to safely deploy rated payload at selected height.
- **Transportable** – Every mast system comes with a rugged wheeled transport bag designed for easy unloading and loading.



PORTABLE MASTS

EXPEDITION SERIES® MAST

Will-Burt's Expedition Series mast delivers the ultimate in true portability. It is the lightest, most stable, single-man portable field mast in the world. Transportable in a compact carrying bag, the Expedition Series mast can be set up by a single individual. Available in multiple height configurations up to 60 ft. / 18.3 m with 40 lb / 18 kg payload, the versatility and transportability of the Expedition Series mast makes it a favorite for quick antenna elevation. This mast may also be shelter-mounted.

- **Composite Tripod**
 - High stability
 - Easy to operate friction locks
 - MIL-Qualified
- **Ergonomic Tube Lifter**
 - Aids in lifting tube sections with heavier payloads
- **Man Portable**
 - All components pack into one wheeled transport bag.
 - Easily carried and transported by one or two persons.
 - Ergonomically balanced and double stitched bag



HURRY-UP MAST

The Hurry-Up mast is ideal for fast deployment of lightweight antennas and equipment. This mast is available in four extended heights from 7 ft. / 3.5 m to 30 ft. / 9 m in one minute or less and easily manages payloads up to 20 lb / 9 kg. The Hurry-Up mast features quick lock/release collars to extend the mast manually by pushing up the sections and fixing them into position. The Hurry-Up mast is well suited for field testing. Optional Drive-On plate allows the mast to be secured by simply driving a vehicle onto the plate.

- **Maintains Azimuth**
 - Locking collars and rigid design
- **Easy to Set Up**
 - Less than one minute
- **Corrosion Resistant**
 - Black anodized finish
- **Optional Features**
 - Drive-on plate mounting
 - External support brackets
 - Hitch-mount



CONTACT YOUR SALES REPRESENTATIVE TODAY

TRAVIS POWELL

Director of Sales - Commercial

Mobile: 330.347.9154

tpowell@willburt.com

STEVEN PINKLEY

Broadcast Mast Sales Manager
and Service Manager

Office: 330.684.4050

Mobile: 330.347.1059

spinkley@willburt.com

JAKE FRANKEN

Business Development Manager

Office: 330.684.4037

Mobile: 330.347.4941

jfranken@willburt.com

The Will-Burt Company (www.willburt.com), located in Orrville, Ohio, is the world's premier manufacturer of telescoping mast and tower elevation solutions – the world's one stop shop offering virtually every payload elevation solution from one source – for military, fire, cellular, broadcast, entertainment and other applications. Will-Burt also designs and manufactures military and other shelters made of all-composite materials that deliver higher performance at lower life cycle cost than metal or partial composite shelters. Will-Burt's LINX security solutions provide integrated access control and intrusion detection certified to protect critical assets. Will-Burt also offers a variety of manufacturing services backed by an ISO 9001:2008 certified quality system and a 14001:2004 environmental management system. Incorporated in 1918, Will-Burt is 100% employee-owned and is classified as a small business.



UNITED STATES

WORLD HEADQUARTERS

169 S. Main St., Orrville, Ohio USA 44667

Telephone: 330.682.7015

Mast Customer Service: 330.684.4000

Fax: 330.684.1190

Email: contact_us@willburt.com

INTEGRATED TOWER SYSTEMS

2703 Dawson Road, Tulsa, OK 74110

Telephone: 800.850.8535

Fax: 918.749.8537

Email: programs@itstowers.com

EUROPE

GEROH

A Will-Burt Company

Fischergasse 25

91344 Waischenfeld, Germany

Phone: +49-9202-18-0

Email: info@geroh.com

UNITED KINGDOM

UK SALES OFFICE

Unit P Morris Business Centre

Morris Farm, Old Holbrook

Horsham, West Sussex

RH12 4TW

United Kingdom

Phone: +44 (0) 1403 265532

Fax: +44 (0) 1403 259072

ASIA

SINGAPORE SALES OFFICE

1 Fullerton Road,

#02-01 One Fullerton,

Singapore 049213

Telephone: +65 6832 5689

Fax: +65 6722 0664

Made in the USA

ISO 9001:2008
ISO 14001:2004

© January, 2016 The Will-Burt Company



Planet Communications Asia PLC.

157 Soi Ramindra 34, Ramindra Rd., Tarang, Bangkok, Bangkok 10230

Tel: +66 2 792 2400 | Fax: +66 2 792 2499, +66 2 943 5771 | E-mail: sales@planetcomm.com



PlanetComm: