

150W / 200W / 250W Ku-Band Indoor BUC/SSPB/SSPA Second Generation GaN Technology



SapphireBlu™ Super Compact

SSPA	ARMAg-K	SG series
SSPB (BUC)	ARMUg-K	SG series

Features

- Output power of 150W to 250W in a compact single package
- High linearity
- Redundant ready with no external controller
- Full M&C capability via RS232, RS485
- Built-in Forward and Reflected precision power metering
- Output RF calibrated Sample Port
- Redundant Systems shipped fully tested
- Infinite VSWR protection with automatic high reflected power shutdown
- Detachable power supply module
- 19" Rackmount, 4RU, 28" deep
- CE marking

Options


- 1:1 or 1:2 Redundant configuration
- L-Band input (SSPB/BUC operation)
- Internal/External reference with auto-sensing
- Ethernet port

Accessories

- Mounting slides
- Remote M&C panel with optional SNMP
- Flexible and rigid waveguides

Overview

The new Super Compact SG Series Ku-Band SSPA/BUCs provide highest power density in the industry. Combined with the traditional Advantech Wireless features, these new series of BUCs provide the ultimate in performance and convenience.

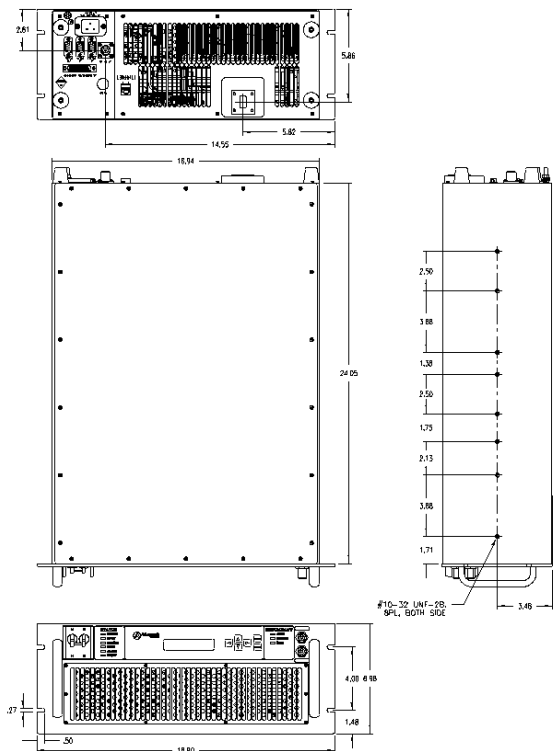

150W / 200W / 250W Ku-Band Indoor BUC/SSPB/SSPA Second Generation GaN Technology

Technical Specifications					
Output Power	150W		200W		250W
P_{SAT} (nominal)	+52.0 dBm		+53.0 dBm		+54.0 dBm
P_{LINEAR}	+50.0 dBm		+51.0 dBm		+51.5 dBm
Operating Frequency	Ku	14.0 – 14.500 GHz	KX	13.75 – 14.5 GHz	
L-Band input (BUC)	Ku	950 – 1450 MHz	KX	950 – 1700 MHz	
Gain	SSPA	64 dB	SSPB (BUC)	74 +/- 3 dB	
Gain adjustment range	20 dB in 0.1 dB steps				
Gain flatness over full band	SSPA 2dB p-p max SSPB (BUC) 4 dB p-p max				
Gain slope over 40 MHz	± 0.3 dB max SSPB (BUC) ± 0.5 dB max				
Gain variation over temperature	± 1.5 dB max				
Input Impedance and VSWR	50 Ω	SSPA 1.3:1	SSPB (BUC) 1.4:1		
Output VSWR	1.25:1				
Noise power density	-75 dBm/Hz in Transmit Band, -150 dBm/Hz in Receive Band (10.95GHz – 12.75 GHz)				
Spurious at $P_{LINEAR1}$	SSPA: -65 dBc max SSPB (BUC): -55 dBc max				
Harmonics	-50 dBc at P_{LINEAR}				
AM/PM conversion	1°/dB at P_{LINEAR}				
Third order intermod. (two tones)	-25 dBc two signal 5 MHz apart at P_{LINEAR} relative to each carrier				
Spectral Regrowth	-30 dBc at P_{LINEAR} (for QPSK at 1.5 x symbol rate and OQPSK at 1,0 x symbol rate)				
Group delay	Ripple 1 nsec p-p max over any 40 MHz band				
Residual AM Noise	0 – 10 kHz	-45 dBc			
	10 kHz – 500 kHz	-20 (1.25 + log F) dBc		F = Frequency in kHz	
	500 kHz – 1 MHz	-80 dBc			
SSPB (BUC)					
Local Oscillator freq.	Ku –13.050 GHz		KX – 12.800 GHz		
Internal Reference frequency (optional)	10 MHz		10 MHz		
Phase Noise	Aging/day	$\pm 2 \times 10^{-10}$	Aging/year	$\pm 5 \times 10^{-8}$	
	Stability	$\pm 2 \times 10^{-8}$ over temp range			
External Reference Frequency phase noise (max)	-53 dBc/Hz at 10 kHz	-73 dBc/Hz at 1000Hz		-93 dBc/Hz at 100 kHz	
	-63 dBc/Hz at 100Hz	-83 dBc/Hz at 10 kHz			
Weight & Dimensions	19" rackmount 4RU high , 28" deep				
Dimensions (L x W x H)	66 lbs (30kg)				
Weight	90-265 VAC (47 – 63 Hz) PF 0.95 min				
AC input voltage	800W at P_{LINEAR}		950W at P_{LINEAR}		1200W at P_{LINEAR}
Power consumption (nominal)	1000W at P_{SAT}		1100W at P_{SAT}		1500W at P_{SAT}
Interfaces	Input (RF or L-Band): N type female		AC line: IEC 320 Inlet		
Environmental	Output Sample Port: N type female		RF output: WR75		
	RS485/RS232/Ethernet DB9 / RJ45				
Temperature	Operating		0°C to +50 °C		
	Storage		-55°C to +85 °C		
	Humidity		5% to 95% non condensing		
Altitude	10,000' AMSL, de-rated by 2 °C/1000' from AMSL				

Ref.: PB-SSPBg-2G-Ku-Rack-150W-250W-001-18219

NORTH AMERICA

USA
info.usa@advantechwireless.com
CANADA
Info.canada@advantechwireless.com

EUROPE

UNITED KINGDOM
info.uk@advantechwireless.com
RUSSIA & CIS
info.russia@advantechwireless.com

SOUTH AMERICA

info.latam@advantechwireless.com
BRAZIL
info.brazil@advantechwireless.com

ASIA

info.asia@advantechwireless.com
INDIA
info.india@advantechwireless.com



Planet Communications Asia PLC.

157 Soi Ramindra 34, Ramindra Rd., Tarang, Bangkhen, Bangkok 10230
Tel: +66 2 792 2400 | Fax: +66 2 792 2499, +66 2 943 5771 | E-mail: sales@planetcomm.com



PlanetComm: 