


# X-Band Rack-mount SSPA

600W / 700W / 800W / 1000W  
ARMA-5000X™ series



## Features

- High gain and linearity
- Output power up to 1000W (see table A)
- Gain adjustment (Local & Remote)
- Remote Monitor & Control (Local & Remote)
- Output sample monitor port
- Temperature gain compensation
- Automatic over-temperature shutdown
- Automatic high reflected power shutdown
- Infinite VSWR protection
- Power factor correction
- CE Marking

## Overview


The ARMA-5000X™ series are the rack-mount solid-state power amplifiers (SSPAs), operating in X-Band frequency range. The amplifier is an integrated unit, complete with power supply and cooling system. Intended for indoor operation, the amplifiers are of compact size and occupy nine rack-mounting spaces (9 RU - 15¾") of a standard 19-inch rack. Built-in microprocessor controller provides capability for serial port interfaces (RS485) for remote monitoring and control.

Advantech's SSPAs set the industry standard for linearity and operating efficiency. Built-in design features and assembly methods incorporated with efficient combining techniques result in the trouble-free operation of the amplifier.

## Application

The featured SSPAs are designed for X-Band satellite up-link applications. They are designed for 19-inch rack mounting in a protected environment. The ARMA-X™ series are available in output power from 20W to 1000W. For higher power Advantech provides phase-combined systems.

Other SSPAs are available for operation at other satellite frequency bands. With all the features of the ARMA-X, Advantech also offers a built-in converter.

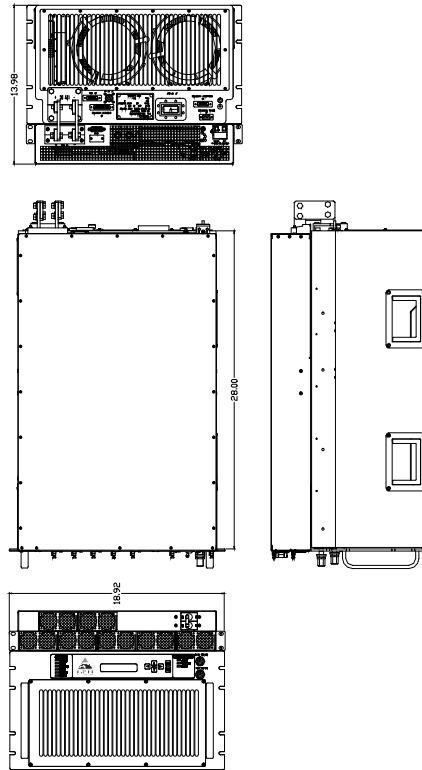

**Table A**

Band	RF Band (GHz)	Output Power (W)
X	7.90 - 8.40 GHz	600 - 700 - 800 -1000

*\*Other frequency sub-bands are available. Please consult factory.*

## Options

- Integrated Block Up Converter
- RF input sample port
- Redundant system

## Accessories

- Redundancy Kit
- Shelf slides
- Remote M&C panel (Ethernet port optional)
- Receive Reject Filter

## Redundancy

With the addition of the appropriate waveguide and switch kit, the ARMA-X amplifiers can be easily converted for the operation in 1:1 redundant configuration with full remote monitor and control capability of the redundant system via serial interface.

## X-Band Rack-mount SSPA

Technical Specifications	600W	700W	800W	1000W	
<b>Electrical Characteristics</b>					
Output power (Psat)	+58 dBm	+58.5 dBm	+59 dBm	+60 dBm	
Output power (P1dB)	+57 dBm	+57.5 dBm	+58 dBm	+59 dBm	
Power gain at maximum gain setting	70 dB min				
Operating frequency range	7.90 – 8.40 GHz				
Gain slope	0.6 dB max over 40 MHz				
Gain flatness over 500 MHz	±1.0 dB max				
Gain variation over temperature	±1.5 dB over full operating temperature range				
Gain variation over 24 hours	±0.25 dB max at constant temperature & drive level				
Gain adjustment range	20 dB min. (0.1 dB resolution)				
Input return loss	18 dB				
Output return loss	19 dB				
Noise power density	-70dBm/Hz max in TX band -110 dBm/Hz max 7.25 – 7.75 GHz RX band				
Spurious at rated power	-65 dBc, max				
Harmonics at rated power	-60 dBc, max				
AM/PM conversion at rated power	2.5°/dB max. at P1dB, 1°/dB max. at 3 dB back-off				
Third order IMD (2 tones 5 MHz apart)	-25 dBc max. at 3 dB total back-off from rated P1dB				
Group delay	Linear: 0.02 nsec/MHz max. Parabolic: 0.003 nsec/MHz <sup>2</sup> max. Ripple: 1.0 nsec p-p max.				
Residual AM (F* - frequency in kHz)	0-10 kHz -45 dBc 10 kHz - 500 kHz -20 (1.25+log F*) dBc 500 kHz - 1 MHz -80 dBc				
<b>Power Requirements</b>					
AC input voltage	180 - 264 VAC (47 – 63 Hz)				
Power consumption (nominal)	3500W	4500W	5700W	6300W	
<b>Mechanical Characteristics</b>					
Panel height	8 RU of 19" rack (6 RU amplifier + 2 RU power supply unit)				
Weight	120kg (264lbs)				
Interfaces:	RF input RF output	N-Type (F) CPR-112 contact	Redundancy RS-485 Discrete port	D-sub 15S D-sub 9S D-sub 25S	AC Line IEC 309 inlet Output sample port N-Type (F)
<b>Environmental Conditions</b>					
Operating temperature:	0°C to +50°C				
Humidity	5%-95%, non-condensing				
Altitude	10,000' AMSL, de-rated 2°C/1,000' from AMSL				

Ref.: PB-ARMA-X-600W-1000W-18226

### NORTH AMERICA

**USA**  
info.usa@advantechwireless.com  
**CANADA**  
Info.canada@advantechwireless.com

### EUROPE

**UNITED KINGDOM**  
info.uk@advantechwireless.com  
**RUSSIA & CIS**  
info.russia@advantechwireless.com

### SOUTH AMERICA

info.latam@advantechwireless.com  
**BRAZIL**  
info.brazil@advantechwireless.com

### ASIA

info.asia@advantechwireless.com  
**INDIA**  
info.india@advantechwireless.com



**Planet Communications Asia PLC.**

157 Soi Ramindra 34, Ramindra Rd., Tarang, Bangkok, Bangkok 10230  
Tel: +66 2 792 2400 | Fax: +66 2 792 2499, +66 2 943 5771 | E-mail: sales@planetcomm.com



PlanetComm:   