

RD-30

Distribution Class Multi-Codec Receiver / Decoder

Applications

- Fiber & IP Transport
- Teleport Infrastructure
- Satellite to IP Turn-Around & Redistribution
- Distribution & Confidence Monitoring
- Satellite, Terrestrial & IP Distribution



Adtec Digital's lightweight RD-30 offers impressive features and specifications in its small 1-RU chassis.

Highlights include: eight channels of audio decoding, robust VBI support, 32APSK demodulation, and ease of use. The clean browser-based UI, SNMP-ready protocol, and front panel interface provide multiple control options from single-user to corporate NMS integrated control.

In addition to MPEG 1 Layer 2, AAC-LC, HE-AAC (v1/v2), Dolby Digital and Dolby Digital+ decoding, the RD-30 supports passthrough audio for Linear PCM, Dolby E, Dolby Digital and Dolby Digital+ (2.0 and surround).

**Online Demo: RD30.adtecdemo.tv:3131
un:adtec pw:webdemo**



www.adtecdigital.com | sales@adtecinc.com | +1.615.256.6619

RD-30 Features & Benefits

- AVC (H.264) and MPEG 2 4:2:0 Video Decoding
- Eight Channels of Audio Processing
- MPEG 1 Layer 2, AAC-LC, HE-AAC (v1/v2),
Dolby (AC-3) and Dolby Digital+ (E-AC-3)
- Analog, AES and SDI Embedded Audio Outputs
- ASI and IP I/O (IP Supports SMPTE 2022 FEC)
- 32APSK Capable Demodulator with DVB-CI CAM Option
- SCTE 35 to SCTE 104 Conversion

Featured Technologies

Dolby Digital

Companion Products

EN-31: Dual Channel AVC / MPEG 2 Encoder

DTA-3050: Multiport Multiplexer



The RD-30's robust inputs and outputs, feature set, and reliability enable satellite, terrestrial, IP and fiber applications for broadcast, digital television, and distribution markets.



www.adtecdigital.com/techspecs/RD-30.pdf



Compression Solutions Seen by Millions



Distribution Class

Multi-Codec Receiver / Decoder

VIDEO DECODER PROFILES

MPEG 2 SD/HD Profile :

ISO 13818-2 MP@ML and MP@HL

MPEG 4 SD/HD Profile:

ISO/IEC 14496-10 MP@L3 HP@L4.2

Supported Resolutions:

480i59.94, 576i50, 720p50/59.94/60,
1080i50/59.94/60,
1080p23.97/24/25/29.97/30

INPUTS

Sync Input:

Auto-detects Bi-Level and Tri-level sync for Genlock
Connector: 1 X BNC (75 Ohm)

DVB-ASI Input:

ASI (EN 50083-9 250 kb/s to 200 Mb/s)
Connector: 1 X BNC (75 Ohm)

IP Input:

UDP, RTP and SMPTE 2022-1 2007 FEC
Supports 1 to 7 TS packets per IP packet
IGMP v1, v2 and v3 support
TS Rate: 250 kb/s to 150 Mb/s
Receiver capability: 2 simultaneous MPEG over IP transport streams
Connector: 2 X RJ45
Connector speed: GigE (10/100/1000 Auto-Negotiate)

AUDIO PROCESSING PROFILES

Supported Audio:

Up to four pairs (eight channels) of audio
MPEG 1 Layer 2, AAC-LC, AAC-HE (v1/v2)
Dolby Digital AC-3 / Dolby Digital+ E-AC-3 stereo, discrete 5.1 surround and passthrough
Dolby E / Linear PCM passthrough

**ALL OUTPUTS OPERATE CONCURRENTLY IN SD.
CVBS INACTIVE IN HD.**

SD-SDI / HD-SDI

Standard:

Video & Audio SMPTE 259M - SD
SMPTE 292M - HD
Connector: 2 X BNC (75 Ohm)

CVBS

Standard:

SD NTSC, PAL-M, PAL-B/G,
PAL-N Composite Video Output
NTSC Pedestal selection
Black at 7.5 IRE or Black at 0 IRE
Connector: 1 X BNC (75 Ohm)

AES AUDIO

Standard:

AES3/EBU Unbalanced
Connector: 4 X BNC (75 Ohm)

ANALOG AUDIO

Standard:

Four balanced pairs via two DB15 connectors. (2 audio pairs per DB15)
Connector: 2 X DB15

VBI / VANC PROCESSING

SDI Ancillary Support:

Closed Captioning (CEA-708)
AFD (SMPTE 2016)
OP-47 (SMPTE RDD-08)
SMPTE RDD-11
SCTE 127 (SMPTE 2031)
EN301775 (SMPTE 2031)
Time Code (SMPTE 12M-2)
SCTE 35 to SCTE 104 Conversion

CVBS/SDI VBI Waveform Support:

Line 21 captions (CEA-608)
TVG2x
AMOL-48/96 (SCTE 127)
Teletext/WSS/VPS (EN 301775)

CONDITIONAL ACCESS

Standard:

DVB Common Scrambling Algorithm Basic Interoperable Scrambling System (BISS)
- Mode 0 Clear (Free To Air - FTA)
- Mode 1
- Mode E

.. TRANSPORT OUTPUTS ..

DVB-ASI OUTPUT

Asynchronous Serial Interface per EN 50083-9
ASI Mirrored from DVB-ASI Input, IP Input, or RF Input with purchase of optional tuner package.
Connector: 1 X BNC (75 Ohm)

IP OUTPUT

UDP, RTP and SMPTE 2022-2 (COP3 FEC)
Up to ten output destinations
Connector: Shares input connectors

SERVICE FILTERING

Up to ten services per output can be defined to the ASI and IP Outputs

PHYSICAL

Operating Temperature (Ambient):

-40C to +65C/-40F to +149F

Power Supply (nominal):

100 - 240 VAC

Wattage:

40W (120V @280mA)

Weight:

RD30 - 6lbs. / 2.72kgs.
RD30-LB - 7lbs. / 3.18kgs.

Measurements:

(H X W X D)
1.72" X 17.2" X 14.6"
43.68mm X 436.88mm X 370.84mm

MANAGEMENT:

Front Panel Controls
Browser-based Web Interface
SNMP
DB9 Relay for monitoring

RD-30

Hardware Models

All models include 1RU chassis, front panel, MP1L2, AAC-LC, HE-AAC v1, HE-AAC v2, Dolby Digital, Dolby Digital+, Dolby E audio decoding, Genlock and VBI Processing as standard features.

RD30	Multi-Codec Receiver / Decoder
RD30-LB	Multi-Codec Receiver / Decoder with DVB-S/S2 Demodulator

Software Options

All keys are field upgradable.

AUD-EXP	Enables two additional audio PID decode. MP1, AAC, AC3.
BISS	Enables BISS descrambling.
IP-OUT	Enables MPEG/IP FEC output.
SCTE104	Enables SCTE 35 -> 104 Conversion, SCTE 35 -> GPO and SCTE 35 generation.
SURROUND	Enables discrete channel audio output for surround decoding of AAC/AC3/AC3+.
SVC-FLTR	Enables PID/Service Filtering. Demultiplexer MPTS to SPTS or MPTS to Program reduced MPTS.
ESAM-POIS	Enables Cablelabs ESAM POIS Interface.

DVB-S/S2 HARDWARE OPTION

(RD30-01-LB) - The LB option is a hardware option.

DVB-CI Descrambling

(DVB-CI EN 50221)
Descrambles decoded service only without purchase of RD30-CAM-KEY.
RD30-CAM-KEY provides up to maximum amount of decryptable services supported by CAM module.

Maximum DVB-CI TS bitrate: 100 Mb/s
All major CA vendors supported

Interface: 2 X DVB-CI CAM slots

DVB-S/S2 L-Band Tuner

(DVB-S EN 300 421 and DVB-S2 EN 302 307)
Four switched L-Band inputs available for decode
Connector: 4 X F Type, Female

Modulation Schemes:

QPSK / 8PSK / 16APSK / 32APSK

Supported Roll-off:

5%, 10%, 15%, 20%, 25%, 35%

Symbol Rate Range:

1 - 60Msym/s

Frequency Range:

950 - 2150MHz

Input Level:


-65dBm to -25dBm

LNB Power and Control:

0, 13, 14, 18 and 19 VDC @ 450mA
22kHz (band selection according to universal LNB for ASTRA satellites)
VCM Demodulation Support
Multistream Support (Single ISI)

Demodulator Software Options

16/32APSK	DVB-S2 advanced feature license (Enables Multistream, VCM, 16/32APSK Modes).
CAM	Enables DVB-CI Multi-service.

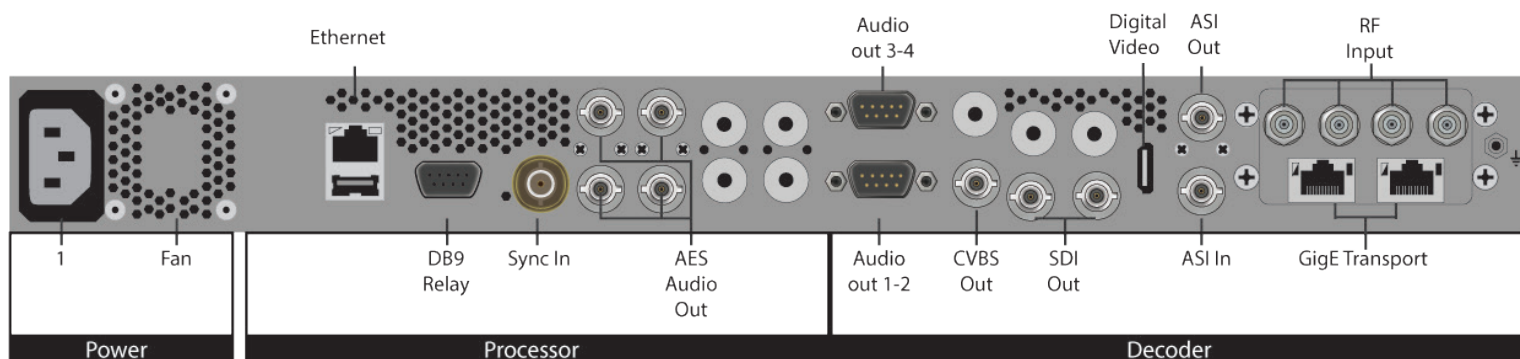

© 2017 Adtec Digital. All rights reserved. All specifications are subject to change at any time and without notice.



Planet Communications Asia PLC.

157 Soi Ramindra 34, Ramindra Rd., Tarang, Bangkok, Bangkok 10230
Tel: +66 2 792 2400 | Fax: +66 2 792 2499, +66 2 943 5771 | E-mail: sales@planetcomm.com



PlanetComm:   

www.adtecdigital.com | sales@adtecinc.com | +1.615.256.6619

Compression Solutions Seen by Millions