

EN-31

Distribution Class Dual Channel AVC Encoder

Applications

- **Private & MSO Cable Systems**
- **Ideal for ATSC Distribution**
- **Hospitality & Education**

Adtec Digital's EN-31 is a dual channel, hardware-based distribution encoder with flexible transport options.

With a low power footprint, the EN-31 inherits Adtec's broadcast quality compression, advanced feature set, service performance and reliability in a dense platform targeted towards high-value applications.

The EN-31 supports ASI remuxing, VBI processing and eight channels of audio encoding per video service. In addition to encoding MPEG 1 Layer 2 audio, the EN-31 also encodes Dolby Digital, AAC-LC and HE-AAC (v1/v2) mixed mode audio, including stereo (2.0) and multi-channel surround (5.1) modes.

Online Demo: EN31.adtecdemo.tv
un:adtec **pw:**webdemo



www.adtecdigital.com | sales@adtecinc.com | +1.615.256.6619

EN-31 Features & Benefits

- Copper and CVBS Video Interfaces
- ASI Input for External Transport Stream Multiplexing
- Automatic SD and HD Detection
- Eight Channels of Audio Encoding Via Embedded SDI and AES Inputs
- MP1L2, DD, AAC-LC, HE-AAC (2.0 and 5.1)
- Multiple Transport Stream over IP Protocols Including: RTP, UDP, RTMP and Zixi

Featured Technologies

DVB-CID

Zixi Link

Dolby Digital

Companion Products

RD-30: Multi-Codec Receiver / Decoder

DTA-3050: Multiport Multiplexer



The EN-31 encodes two services, multiplexes them into an MPTS and concurrently transports it via ASI, IP, and optional RF.

The DVB-S/S2 capable modulator supports both IF-Band and L-Band with 10MHz L-Band insertion and Carrier ID.



www.adtecdigital.com/techspecs/EN-31.pdf



Compression Solutions Seen by Millions



Distribution Class Dual Channel AVC Encoder

VIDEO ENCODER PROFILES

AVC Profiles (MP4):

SD Profile (AFF - ISO/IEC14496-10)
MP@L3.0 (0.5 Mb/s - 10 Mb/s Data Rate)

HD Profile (ISO/IEC14496-10)
HP@Level 4.0 (1 Mb/s - 30 Mb/s Data Rate)

Video Resolution & Frame Formats:

1920 x 1080 (59.94i / 50i)
1440 x 1080 (59.94i / 50i)
1280 x 720 (59.94p / 50p)
720 x 480 (59.94i), 720 x 576 (50i)

VIDEO INPUT

CVBS:

SD Composite Analog (CVBS)
Connector: 2 X BNC (75 Ohm)

SDI:

SD-SDI (SMPTE 259M - 270 Mb/s) with
embedded audio per SMPTE 272M

HD-SDI (SMPTE 292M - 1.485 Gb/s) with
embedded audio per SMPTE 299M
Auto frame rate and resolution detection
Connector: 2 X BNC (75 Ohm)

AUDIO PROCESSING PROFILES

Audio Encoding:

Four audio pairs per video encoder
MPEG 1 Layer 2, AAC-LC (2.0/5.1), AAC-HE
v1/v2 surround encode
Dolby Digital AC-3 (2.0/5.1)

Audio Passthrough:

Dolby E 5.1/2.0/1.0, Linear PCM

Audio Inputs:

AES Audio
Standard: AES3
Connector: 2 X BNC (75 Ohm)

SDI Embedded Audio
Standard: Digital audio embedded per SMPTE
272M (SD) and SMPTE 299M (HD)
Connector: 1 X BNC (75 Ohm)

Analog Audio
Analog Stereo Pairs (600 Ohm Balanced)
Connector: D9

EMERGENCY ALERT SYSTEM (EAS) INPUT

EAS Video Interface:

Terminated D1 Composite Input with loop

EAS Audio:

Mono audio channel with loop via RCA

EAS Triggering:

GPI, Web UI, XCP

ASI INPUT

ASI Input used for: ASI Remux / Cascade,
DVB-Subtitles or Third Party PSIP Generator

Connector:

1 X BNC (75 Ohm)

CONDITIONAL ACCESS

Standard:

DVB Common Scrambling Algorithm Basic
Interoperable Scrambling System (BISS)
BISS 0/1/E with unique PID control

VBI / VANC PROCESSING

Waveform or Analog (Composite or SD-SDI):

Connector: RCA jack 75 Ohm Terminated Input
Closed Captions per CEA-608-C 2005 & DVS-157
Wide Screen Signaling (WSS) per ETSI
EN310294 V1.4.1 (2003-04)
Teletext per ETSI EN 300 472 V1.3.1 (2003-05)

Ancillary (ANC) per SMPTE 291M (SD/HD-SDI):

Connector: BNC 75 Ohm Terminated Input
Closed Captions per CEA-708 (SMPTE 291M)
Teletext per OP47 and SMPTE 2031
VITC per SMPTE 2038
EBU Teletext/Subtitles
WSS/Teletext/NABTS/CEA-608/TV2GX/AMOL48/96
User Defined (2031-2007) per SMPTE 2031
Support for SCTE 104 to SCTE 35 conversion
AFD/Bar Data/Pan Scan per CEA-CEB16 (2006)
per SMPTE 2016

Waveform Bridging and Conversion:

Connector: BNC 75 Ohm Terminated Input
CEA 608 to CEA 708 up-conversion

Caption, Teletext & WSS Bridging:

Via Composite merged with SD/HD SDI

Transport Stream User Data Carriage:

SCTE 127-2007, ETSI EN 301 775, v1.2.1
(2003-05)

DVB-ASI OUTPUT

Asynchronous Serial Interface
ISO13818-1 MPEG 2 Transport Stream per
EN 50083-9
Connector: 2 X BNC (75 Ohm)

IP OUTPUT

Four unique TCP, UDP, or RTP (RFC 3550)
encapsulated routes with SMPTE 2022 (COP3
FEC).

Output Rates: 1 - 150Mbps

MPEG 2 RTP v2 transport (RFC 3550)
MPEG 2 UDP transport

Output Rates: 1 - 50Mbps

RTP SMPTE 2022-1 2007 FEC

Output Rates: 1 - 25Mbps

TCP Transport
Zixi Feeder

PHYSICAL

Operating Temperature (Ambient):

0C to 44C / -32F to 113F

Measurements:

(H X W X D)
1.75" X 19" X 18"
44.45mm X 482.6mm X 457.2mm

Weight:

EN31- 9lbs. / 4.08kgs.
EN31/IF/LB/10M - 12.25lbs. / 5.56kgs

Power:

Redundant auto switching dual
100 - 240 VAC 50/60Hz

MANAGEMENT

Front Panel Control with Password Protection Capability
Browser-based Web Interface with Advanced Security Features
SNMP v2c Available for NMS Integration
COM2 RS232 Serial Connectivity
Telnet Connectivity
FTP Connectivity

EN-31

Hardware Models

All models include 1RU chassis, redundant AC power supplies, front panel, BISS, FEC, MPEG 1 Layer 2 audio encoding & VBI processing as standard features.

EN31	Dual Channel AVC Encoder
EN31/IF/LB/10M	Dual Channel AVC Encoder with DVB-S/S2/S2X modulator

Software Options

All keys are field upgradable.

AAC-1-AUD	Enables AAC audio encode for Service 1. Support for 4 pairs of HE-AAC v2, 3 pairs of HE-AAC v1, 2 pairs of AAC-LC, or 1 set of AAC-LC/HE-AACv1 5.1 encoding.
AAC-2-AUD	Enables AAC audio encode for Service 2. Support for 4 pairs of HE-AAC v2, 3 pairs of HE-AAC v1, 2 pairs of AAC-LC, or 1 set of AAC-LC/HE-AACv1 5.1 encoding.
DD-1-AUD	Enables Dolby Digital (AC3) 2.0, 1.0, or 5.1 mode audio encode on Service 1. Supports 3 pairs of Dolby Digital 2.0 or 1 Dolby Digital 5.1.
DD-2-AUD	Enables Dolby Digital (AC3) 2.0, 1.0, or 5.1 mode audio encode on Service 2. Supports 3 pairs of Dolby Digital 2.0 or 1 Dolby Digital 5.1.
REMUX	Enables ASI input via BNC connector for encoder cascade multiplexing. Manual PID/Program number configuration required.
RTMP-TX	Adds capability for RTMP formatted IP output. Can stream to content delivery networks or web-based services that accept RTMP formats.
ZIXI-TX	Adds capability for Zixi Feeder Edge Point. Zixi Feeder capable of streaming to Zixi Broadcaster, up to 20Mb/s w/o FEC and up to 15Mb/s w/FEC. Zixi Link feature available when paired with the RD-71 (RD71-ZIXI-LINK-KEY required).

IF AND L-BAND MODULATOR

(EN-31/IF/LB/10M Model) - DVB-CID Compliant

Some specifications require purchase of feature keys. IF and L-Band outputs are not active simultaneously.

Modulation Modes:

QPSK / 8PSK / 16APSK / 32APSK / 64APSK / 128APSK / 256APSK

Interface Rate:

50 kbit/s- 150 Mb/s

Baudrate Range:

0.05 - 72 Mbaud

Clean Channel Technology - Roll-off factors:

5%, 10%, 15%, 20%, 25%, 35%

IF Output Output level:

-35 to +5dBm (+/- 2dB)

Frequency:

50 - 180MHz

Connector:

1 X BNC (50 Ohm)

L-Band Output Output level:

-35 to +5dBm (+/- 2dB)

Frequency:

950 - 2150MHz

Connector:

1 X BNC (50 Ohm)

L-Band Monitor Output Output level:

-45dBm (+/- 5dB)

Frequency:

Follows L-Band main output or fixed at 1050 MHz when IF output active.

Connector:

1 X BNC (50 Ohm)

IF Monitor Output Output level:

-30dBm (+/- 5dB)

Frequency:


1210MHz

Connector:

1 X BNC (50 Ohm)

Modulator Software Options

IF/LB/10M-16PSK	Enables 16APSK with 5%-35% roll-off to 15 Mbaud.
IF/LB/10M-32APSK	Same as above, adds 32APSK.
IF/LB/10M-64APSK	Same as above, adds 64APSK.
IF/LB/10M-36M	Enables 36 Mbaud.
IF/LB/10M-72M	Enables 72 Mbaud.
IF/LB/10M-CID	Enables RF Carrier ID information to be transported for vendor identification.
IF/LB/10M-DVB-S2X	Adds DVB-S2X capability.

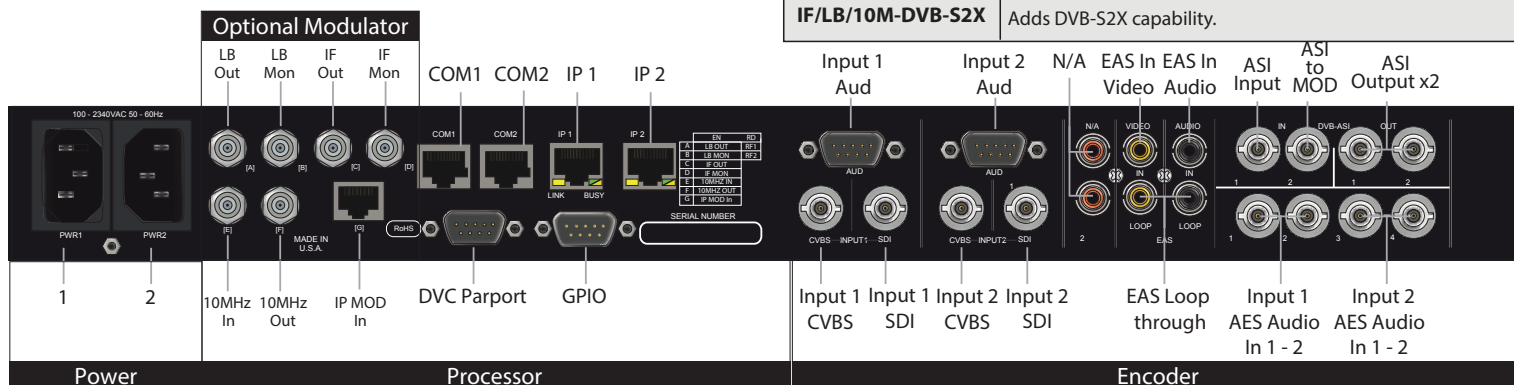

© 2017 Adtec Digital. All rights reserved. All specifications are subject to change at any time and without notice.



Planet Communications Asia PLC.

157 Soi Ramindra 34, Ramindra Rd., Tarang, Bangkok, Bangkok 10230

Tel: +66 2 792 2400 | Fax: +66 2 792 2499, +66 2 943 5771 | E-mail: sales@planetcomm.com



PlanetComm:

www.adtecdigital.com | sales@adtecinc.com | +1.615.256.6619

Compression Solutions Seen by Millions