



## VIDEO BAR FOR LARGE CONFERENCE ROOMS

### BENEFITS

- Life-like video with dual cameras each with their own 4K+ sensor
- Crystal-clear, boardroom-filling audio from two-way stereo speakers, aluminum cone tweeters, and advanced bass ports
- Pinpoint-accurate speaker tracking and professional-quality group framing from AI-driven camera array
- Prevent distracting noises and side conversations from interrupting your meetings with NoiseBlockAI and Acoustic Fence technology

### POLY STUDIO X70

Poly Studio X70 is a beautifully engineered, premium videoconference solution that combines razor-sharp 4K video with boardroom filling stereo sound for simply the best meeting experience available. With a sleek all-in-one plug-and-play design, the Poly Studio X70 eliminates tangled cables and IT headaches while providing robust audio and video. Enjoy native support from your choice of video-as-a-service platforms — no PC needed. Its AI-driven video and audio experience enables the Poly Studio X70 to turn any large-room video call into a hassle-free delight.

- Dual cameras with 4K+ sensors
- Two-way stereo speakers, aluminum cone tweeters, and advanced bass ports
- AI-driven camera array
- NoiseBlockAI noise reduction technology
- Seamless native experience on leading cloud video services



# POLY STUDIO X70



## SPECIFICATIONS

### PACKAGE INCLUDES

- Poly Studio X70
- Power Supply
- 2x HDMI cable
- Ethernet Cable
- Wall mount

### VIDEO STANDARDS AND PROTOCOLS

- H.264 AVC
- H.264
- High Profile
- H.265

### VIDEO INPUT

- 1x HDMI

### VIDEO OUT

- 2x HDMI
- Touch display compatible

### PEOPLE VIDEO RESOLUTION

- 4K, 30 fps (TX and RX) from 2048 Kbps
- 1080p, 30 fps from 1740 Kbps
- 1080p, 30 fps from 1024 Kbps
- 720p, 30 fps from 832 Kbps
- 720p, 30 fps from 512 Kbps

### CONTENT VIDEO RESOLUTION

- UHD (3840 x 2160)
- FHD (1920 x 1080p)
- WSXGA+ (1680 x 1050)
- UXGA (1600 x 1200)
- SXGA (1280 x 1024)
- WXGA (1280 x 768)
- HD (1280 x 720p)
- XGA (1024 x 768)
- SVGA (800 x 600)
- Output UHD (3840 x 2160)

- WUXGA (1920 x 1200)
- HD (1920 x 1080)
- WSXGA+ (1680 x 1050)
- SXGA+ (1400 x 1050)
- SXGA (1280 x 1024)
- HD (1280 x 720)
- XGA (1024 x 768)
- Content frame rate 5–60 fps (up to 4K resolution at 15 fps in call)

### ROOM ANALYTICS

- Room participant counting detection
- Air Quality Sensor<sup>1</sup>
  - CO<sub>2</sub> and Volatile Organic Compounds (VOC)

### CONTENT SHARING

- Poly content app
- Apple Airplay
- Miracast
- HDMI input
- Whiteboarding

### CAMERA

- 2 lenses
  - 120-degree HFOV, 70-degree HFOV
  - 140-degree DFOV, 78-degree DFOV
- 2x 20 Megapixel sensors
- 7.3x digital zoom
- UHD 2160p (4K) capture resolution
- Automatic group framing
- Automatic speaker tracking
- Additional cameras can be added via USB

### AUDIO INPUT

- 1x 3.5 mm

### MICROPHONES

- 2x MEMS microphones, plus 2x 2nd order microphones
- Microphone pickup range up to 25 ft

### AUDIO OUTPUT


- 1x 3.5mm
- Two-way Stereo Speakers with Custom tuned bass ports
  - Power Handling (RMS) 20 Watts
  - Power Handling (MAX) 30 Watts
  - Sensitivity 83 dB
- Mid speakers
  - Power Handling (RMS) 15 Watts
  - Power Handling (MAX) 20 Watts
  - Sensitivity 89 dB
- Custom Tuned Bass Ports for rich sound

### OTHER INTERFACES

- 2x USB-A (3.0)<sup>2</sup>
- 1x USB-C<sup>3</sup>
- Bluetooth® 5.0
- 2x RJ45<sup>1</sup>
- WiFi 802.11a/b/g/n/ac (MIMO) Multi-channel Concurrency

### AUDIO STANDARDS AND PROTOCOLS

- 22 kHz bandwidth with Polycom Siren 22 technology
- 20 kHz bandwidth with G.719 (M- Mode) and Polycom Siren 22 technology
- 14 kHz bandwidth with Polycom Siren 14 technology, G.722.1 Annex C
- 7 kHz bandwidth with G.722, G.722.1
- 3.4 kHz bandwidth with G.711, G.728, G.729A

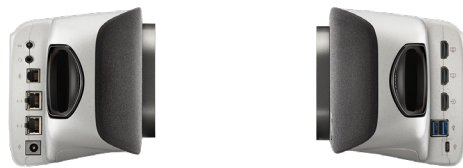

## SPECIFICATIONS

### NETWORK

- IPv4
- IPv6
- 2x 10/100/1G Ethernet (RJ45)
- Auto-MDIX
- H.323 and/or SIP up to 6 Mbps running Poly Video App
- Polycom Lost Packet Recovery (LPR) technology
- Dynamic bandwidth allocation
- Reconfigurable MTU size
- Web proxy support
  - Basic
  - Digest
  - NTLM

### SECURITY

- Media encryption (H.323, SIP)
  - AES-128
  - AES-256
- H.235.6 support
- Authenticated access to admin menus, web interface, and API
- Local account password policy configuration
- Security profiles
- Local account and login port lockout
- Secure defaults
- Remote logging with support for TLS
- Active directory external authentication
- Electronic privacy shutter

### OPTIONS

- VESA mount kit
- Stand
- Poly TC8
- Poly Bluetooth remote control
- Poly Trio
- Studio Extension Microphone

### INTEROPERABILITY

- All cloud service providers through Poly Video App Mode
- USB device mode
- Support for native 3rd party applications includes:
  - Zoom
  - GoToRoom
  - RingCentral
  - StarLeaf
  - DialPad

### ELECTRICAL

- Auto sensing power supply
- Typical operating voltage/power
  - 37 VA @ 120 V @ 60 Hz
  - 37 VA @ 230 V @ 50/60 Hz
- Typical BTU/h
  - 65

### ENVIRONMENTAL SPECIFICATION

- Operating temperature
  - 0 to 40 °C
- Operating humidity (non-condensing)
  - 15 to 80%
- Non-operating temperature
  - -40 to 70 °C
- Non-operating humidity (non-condensing)
  - 5 to 95%
- Maximum altitude
  - 16,000 ft

### PHYSICAL CHARACTERISTICS

- 840.18 mm / 33.1 in (W) x 135.38 mm / 5.3 in (H) x 117.33 mm / 4.6 in (D)
- 7.05 lbs/3.2 kg

### MANAGEABILITY

- Cloud: Poly Lens service

### WARRANTY

- One-year return to factory parts and labor

<sup>1</sup> Designated for future use

<sup>2</sup> Used for connected peripherals

<sup>3</sup> Used for connected PC

## LEARN MORE

For more information on Poly Studio X70 visit [www.poly.com/studio-x70](http://www.poly.com/studio-x70)

## DATA SHEET

©2021 Plantronics, Inc. All rights reserved. Poly and the propeller design are trademarks of Plantronics, Inc. The Bluetooth trademark is owned by Bluetooth SIG, Inc. and any use of the mark by Plantronics, Inc. is under license. All other trademarks are the property of their respective owners. 8.21 1098651



Planet Communications Asia PLC.  
157 Soi Ramindra 34, Ramindra Rd., Tarang, Bangkok, Bangkok 10230  
Tel: 02 792 2400 Fax: 02 792 2499 Email : marketing@planetcomm.com



PlanetComm :   